



V 20



for Cold Formed



V 20

For ~90° corners with cold formed sheet piles,
cold-formed sheet piles to Larssen U/Z/AZ
(as interlocks vary, specific swivel range is not stated, but
some swivel should be expected)

Installation

1. Please review the proper interlocking examples that are listed.
2. Thread the connector into the interlock while the sheet pile is out of the ground.
3. Adjust the connector to the appropriate position.
4. Tack or spot-weld the connector in place. Typically, a ~250mm (~10") weld, attaching the connector to the sheet pile to the top is sufficient.
5. Drive/extract the sheet pile (with the connector attached) as you would normally.

Properties

Steel grade:	S355GP, S430GP
	ASTM A572 Gr. 50/60
	ASTM A690 MARINER™ Steel
Weight:	~8.85 lb/ft



V 20

Anwendungen:

1. 90° Eckverbindung (durch die verschiedenen Kombinationen variieren die Schwenkbereiche in Abhängigkeit von der Schlossausbildung, vgl. V20 Larssen)
2. Übergangsprofil zwischen Leichtprofilen und AZ wie auch Larssen U- bzw. Z- Bohlen



Eigenschaften

Stahlgüten:	S355GP, S430GP
	ASTM A572 Gr. 50/60
	ASTM A690 MARINER™ Steel
Gewicht:	~13,2 kg/m



V 20

Propiedades

Calidades de acero:	S355GP, S430GP
	ASTM A572 Gr. 50/60
	ASTM A690 MARINER™ Steel
Peso:	~13,2 kg/m



V 20

Caractéristiques


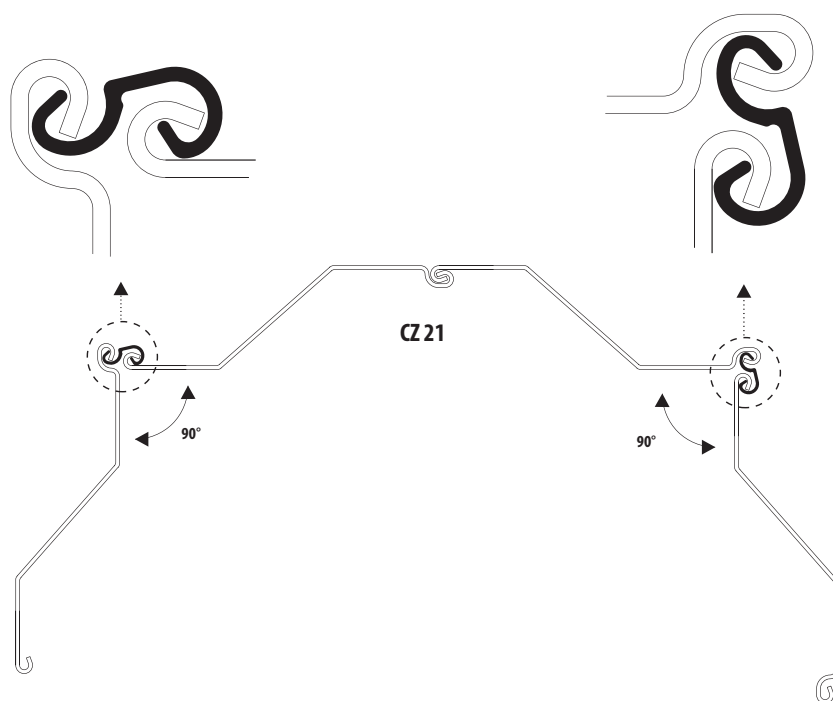

Nuances d'acier:	S355GP, S430GP
	ASTM A572 Gr. 50/60
	ASTM A690 MARINER™ Steel
Poids:	~13,2 kg/m




V 20

Caratteristiche

Qualità dell'acciaio:	S355GP, S430GP
	ASTM A572 Gr. 50/60
	ASTM A690 MARINER™ Steel
Peso:	~13,2 kg/m


CZ / SKZ to AZ transition straight-thru connection:

Proper interlocks:


(big-hook to small-hook)

Improper interlocks:


(big-hook to big-hook or
small-hook to small-hook)